


NX5 SERIES

Compact Multi-voltage Photoelectric Sensor

Power Supply Built-in

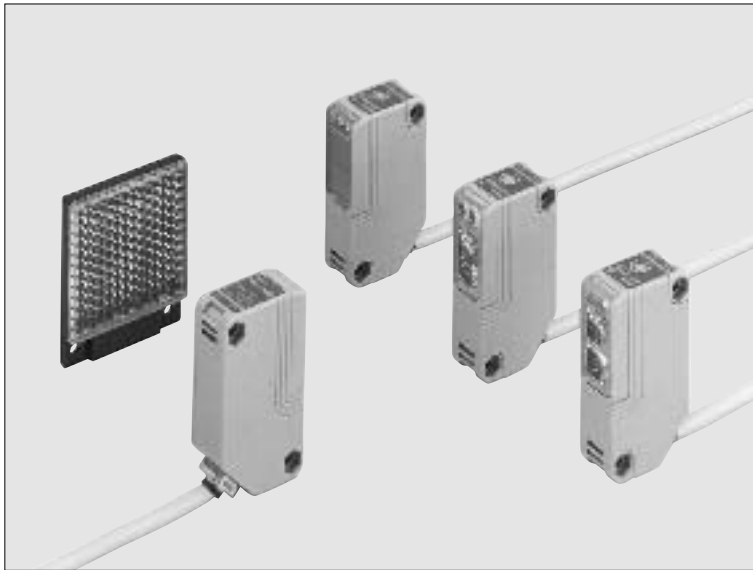


Multi-voltage photoelectric sensor usable worldwide



Multi-voltage


The **NX5** series can operate at 24 to 240 V AC or 12 to 240 V DC, which makes it suitable for supply voltages all over the world.

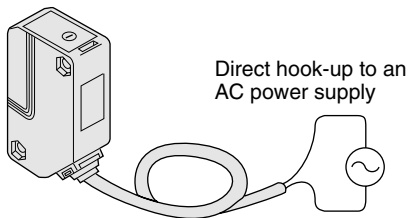

No need to arrange a DC power supply.


Long sensing range

Most suitable for conveyor lines and parking lot applications.

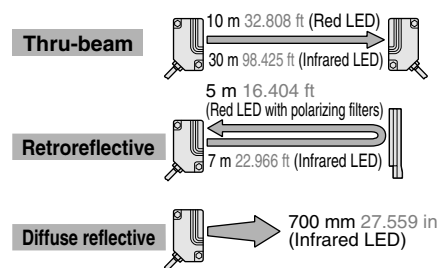

High reliability


It has IP66 protection. Moderate dust or water splashes do not affect it. The new N₂ hermetically sealed output relay significantly increases its reliability.

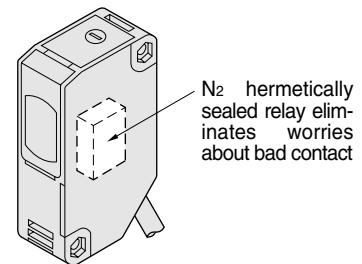

Compact size


Despite being multi-voltage, it has a depth of just 35 mm 1.378 in. (W18×H62×D35 mm W0.709×H2.441×D1.378 in)

Conventional model

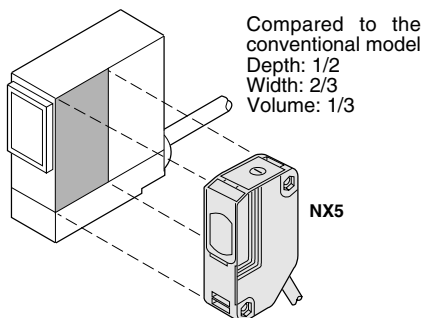


Easy alignment

The 10 m 32.808 ft thru-beam type sensor and the 5 m 16.404 ft retroreflective type sensor incorporate a red LED beam source. Beam alignment can be attained by visually checking the emitted beam.

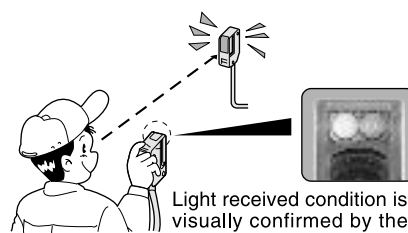


Interference prevention

Two sensors operate quite normally even if mounted close together. (Excluding the 30 m 98.425 ft thru-beam type sensor)

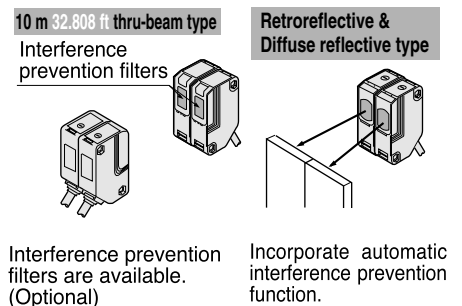


APPLICATIONS


Detecting car position at parking garage

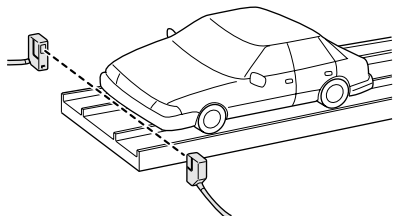

Detecting workpieces on conveyor line

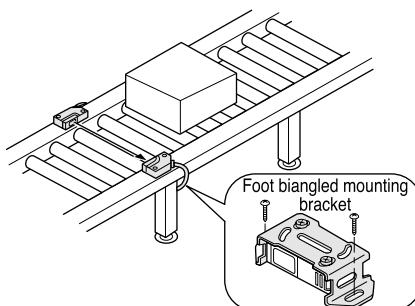

Detecting golf balls

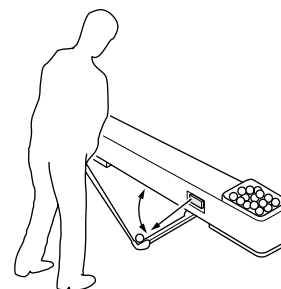


ORDER GUIDE

| Type | Appearance | Sensing range | Model No. (Note 2) | Emitting element | Output |
|--------------------|------------|--|--------------------|------------------|------------------|
| Thru-beam | | 10 m 32.808 ft | NX5-M10RA | Red LED | Relay contact 1c |
| | | | NX5-M10RB | | |
| | | 30 m 98.425 ft | NX5-M30A | Infrared LED | |
| | | | NX5-M30B | | |
| Retroreflective | | 0.1 to 5 m 0.328 to 16.404 ft (Note 1) | NX5-PRVM5A | Red LED | |
| | | | NX5-PRVM5B | | |
| | | 0.1 to 7 m 0.328 to 22.966 ft (Note 1) | NX5-RM7A | Infrared LED | |
| | | | NX5-RM7B | | |
| Diffuse reflective | | 700 mm 27.559 in | NX5-D700A | Infrared LED | |
| | | | NX5-D700B | | |

NOTE: Mounting bracket is not supplied with the sensor. Please select from the range of optional sensor mounting brackets (three types).

Notes: 1) The sensing range of the retroreflective type sensor is specified for the RF-230 reflector. Further, the sensing range is the possible setting range for the reflector. The sensor can detect an object less than 0.1 m 0.328 ft away.

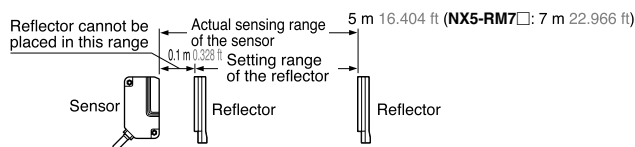

2) Light-ON type sensor (model No. with suffix 'A') and Dark-ON type sensor (model No. with suffix 'B') are available in the NX5 series. For the following models, in case of power off, the output relay condition is the same as when an object is detected. (In case of power supply line disconnection, the output operation is the same as when an object is detected.) Refer to p.326 for the output operation of each model.

| Thru-beam type | Retroreflective type | Diffuse reflective type |
|-----------------------------------|------------------------------------|-------------------------|
| NX5-M10RA and NX5-M30A (Light-ON) | NX5-PRVM5A and NX5-RM7A (Light-ON) | NX5-D700B (Dark-ON) |

5 m 16.404 ft cable length type

5 m 16.404 ft cable length type (standard: 2 m 6.562 ft) is also available.

• Table of Model Nos.

| Type | | Standard | 5 m 16.404 ft cable length type | |
|--------------------|-------------------------|------------|---------------------------------|---------------|
| Thru-beam | Light-ON | NX5-M10RA | NX5-M10RA-C5 | |
| | Dark-ON | NX5-M10RB | NX5-M10RB-C5 | |
| Long sensing range | Light-ON | NX5-M30A | NX5-M30A-C5 | |
| | Dark-ON | NX5-M30B | NX5-M30B-C5 | |
| Retroreflective | With polarizing filters | Light-ON | NX5-PRVM5A | NX5-PRVM5A-C5 |
| | Dark-ON | NX5-PRVM5B | NX5-PRVM5B-C5 | |
| Long sensing range | Light-ON | NX5-RM7A | NX5-RM7A-C5 | |
| | Dark-ON | NX5-RM7B | NX5-RM7B-C5 | |
| Diffuse reflective | Light-ON | NX5-D700A | NX5-D700A-C5 | |
| | Dark-ON | NX5-D700B | NX5-D700B-C5 | |

Accessory

• RF-230 (Reflector)




NX5

OPTIONS

| Designation | Model No. | Description |
|---|---|---|
| Sensor mounting bracket | MS-NX5-1 | Foot angled mounting bracket (The thru-beam type sensor needs two brackets.) |
| | MS-NX5-2 | Foot biangled mounting bracket (sensor protection bracket) (The thru-beam type sensor needs two brackets.) |
| | MS-NX5-3 | Back angled mounting bracket (The thru-beam type sensor needs two brackets.) |
| Slit mask (For thru-beam type sensor only) | OS-NX5-3 × 6 (Slit size 3 × 6 mm) (0.118 × 0.236 in) | Slit on one side <ul style="list-style-type: none"> • Sensing range: 3 m 9.843 ft [NX5-M10R□] 16 m 52.493 ft [NX5-M30□] • Min. sensing object: ϕ10 mm ϕ0.394 in |
| | | Slit on both sides <ul style="list-style-type: none"> • Sensing range: 1 m 3.281 ft [NX5-M10R□] 6 m 19.685 ft [NX5-M30□] • Min. sensing object: 3 × 6 mm 0.118 × 0.236 in |
| Interference prevention filter (For NX5-M10RA or NX5-M10RB only) | PF-NX5-V (Vertical) | Same type of filters on both sides <ul style="list-style-type: none"> • Sensing range: 5 m 16.404 ft • Min. sensing object: ϕ20 mm ϕ0.787 in (One set consists of 2 pcs. of interference prevention filters.) |
| | PF-NX5-H (Horizontal) | |
| Reflector (For retro-reflective type sensor only) | RF-210 | <ul style="list-style-type: none"> • Sensing range: 0.1 to 1.5 m 0.328 to 4.921 ft [NX5-PRVM5□] 0.1 to 2.5 m 0.328 to 8.202 ft [NX5-RM7□] • Min. sensing object: ϕ30 mm ϕ1.181 in |
| | RF-220 | <ul style="list-style-type: none"> • Sensing range: 0.1 to 3.5 m 0.328 to 11.483 ft [NX5-PRVM5□] 0.1 to 5 m 0.328 to 16.404 ft [NX5-RM7□] • Min. sensing object: ϕ35 mm ϕ1.378 in |
| Reflector mounting bracket | MS-RF21-1 | Protective mounting bracket for RF-210 It protects the reflector from damage and maintains alignment. |
| | MS-RF22 | For RF-220 |
| | MS-RF23 | For RF-230 |
| Reflective tape (For retro-reflective type sensor only) | RF-11 | <ul style="list-style-type: none"> • Ambient temperature: -25 to +50 °C -13 to +122 °F • Ambient humidity: 35 to 85 % RH Notes: i) Keep the tape free from stress. If it is pressed too much, its capability may deteriorate. ii) Do not cut the tape. It will deteriorate the sensing performance. |
| | RF-12 | |
| Sensor checker (Note) | CHX-SC2 | It is useful for beam alignment of thru-beam type sensors. The optimum receiver position is given by indicators, as well as an audio signal. |

Sensor mounting bracket

- MS-NX5-1
- MS-NX5-2
- MS-NX5-3

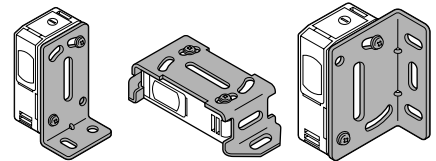

Two M4 (length 25 mm 0.984 in) screws with washers and two M4 nuts are attached.


Two M4 (length 25 mm 0.984 in) screws with washers and two M4 nuts are attached.

Two M4 (length 25 mm 0.984 in) screws with washers and two M4 nuts are attached.

Slit mask

- OS-NX5-3 × 6


Fitted on the front face of the sensor with one-touch.



Interference prevention filter


- PF-NX5-V
- PF-NX5-H

(For NX5-M10R□ only)
Two sets of thru-beam type sensors (Red LED type) can be mounted close together.




Reflector

- RF-210




- RF-220




Reflective tape

- RF-11



- RF-12




Reflector mounting bracket


- MS-RF23

- MS-RF22


- MS-RF21-1



Two M4 (length 10 mm 0.394 in) screws with washers are attached.




Two M3 (length 8 mm 0.315 in) screws with washers are attached.



Two M3 (length 12 mm 0.472 in) screws with washers are attached.

Sensor checker


- CHX-SC2

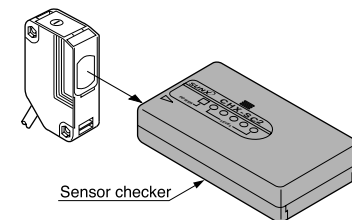

SPECIFICATIONS

| Type | Thru-beam | | | | Retroreflective | | | | Diffuse reflective | | |
|---|--------------------------|---|-------------------------|---|--------------------|--|------------|--|--------------------|---|------------------------------------|
| | Long sensing range | | With polarizing filters | | Long sensing range | | | | | | |
| Item | Model No. | NX5-M10RA | NX5-M10RB | NX5-M30A | NX5-M30B | NX5-PRVM5A | NX5-PRVM5B | NX5-RM7A | NX5-RM7B | NX5-D700A | NX5-D700B |
| Sensing range | | 10 m 32.808 ft | | 30 m 98.425 ft | | 0.1 to 5 m 0.328 to 16.404 ft (Note 1) | | 0.1 to 7 m 0.328 to 22.966 ft (Note 1) | | 700 mm 27.559 in (Note 2) | |
| Sensing object | | φ20 mm φ0.787 in or more opaque object (Note 3) | | | | φ50 mm φ1.969 in or more opaque, translucent or specular object (Note 1) | | φ50 mm φ1.969 in or more opaque or translucent object (Note 1) | | Opaque, translucent or transparent object | |
| Hysteresis | | _____ | | | | | | | | | 15 % or less of operation distance |
| Repeatability (perpendicular to sensing axis) | | 0.1 mm 0.004 in or less | | 0.2 mm 0.008 in or less | | | | 0.3 mm 0.012 in or less | | | |
| Supply voltage | | 24 to 240 V AC ± 10 % or 12 to 240 V DC ± 10 % Ripple P-P 10 % or less | | | | | | | | | |
| Power consumption | | Emitter: 1 VA or less Receiver: 2 VA or less | | Emitter: 1.5 VA or less Receiver: 2 VA or less | | 2 VA or less | | | | | |
| Output | | Relay contact 1 c • Switching capacity: 250 V AC 1 A (resistive load) 30 V DC 2 A (resistive load) • Electrical life: 500,000 or more switching operations (switching frequency 3,600 operations/hour) • Mechanical life: 100 million or more switching operations (switching frequency 36,000 operations/hour) | | | | | | | | | |
| Output operation | | Light-ON | Dark-ON | Light-ON | Dark-ON | Light-ON | Dark-ON | Light-ON | Dark-ON | Light-ON | Dark-ON |
| Response time | | 10 ms or less | | | | | | | | | |
| Operation indicator | | Red LED (lights up when the output is ON) | | | | | | | | | |
| Stability indicator | | Green LED (lights up under stable light received condition or stable dark condition) | | | | | | | | | |
| Power indicator | | _____ | | Red LED (lights up when the power is ON) | | _____ | | | | | |
| Sensitivity adjuster | | Continuously variable adjuster | | _____ | | Continuously variable adjuster | | _____ | | Continuously variable adjuster | |
| Automatic interference prevention function | | (Use optional interference prevention filters) | | _____ | | Incorporated (Two units of sensors can be mounted close together.) | | | | | |
| Environmental resistance | Pollution degree | 3 (Industrial environment) | | | | | | | | | |
| | Protection | IP66 (IEC) | | | | | | | | | |
| | Ambient temperature | - 20 to + 55 °C - 4 to + 131 °F (No dew condensation or icing allowed)(Note 4), Storage: - 30 to + 70 °C - 22 to + 158 °F | | | | | | | | | |
| | Ambient humidity | 35 to 85 % RH, Storage: 35 to 85 % RH | | | | | | | | | |
| | Ambient illuminance | Sunlight: 11,000 lx at the light-receiving face, Incandescent light: 3,500 lx at the light-receiving face | | | | | | | | | |
| | EMC | EN 50081-2, EN 50082-2, EN 61000-6-2 | | | | | | | | | |
| | Voltage withstandability | 1,500 V AC for one min. between power supply and output terminals, 1,000 V AC for one min. between relay contact terminals | | | | | | | | | |
| | Insulation resistance | 20 MΩ, or more, with 500 V DC megger between power supply and output terminals, and between relay contact terminals | | | | | | | | | |
| | Vibration resistance | 10 to 55 Hz frequency, 1.5 mm 0.059 in amplitude in X, Y and Z directions for two hours each | | | | | | | | | |
| | Shock resistance | 500 m/s ² (50 G approx.) in X, Y and Z directions for three times each | | | | | | | | | |
| Emitting element | | Red LED (modulated) | | Infrared LED (modulated) | | Red LED (modulated) | | Infrared LED (modulated) | | | |
| Material | | Enclosure: Polycarbonate, Lens: Polycarbonate, Cover: Polycarbonate, Front cover (retroreflective type sensor only): Acrylic | | | | | | | | | |
| Cable | | 0.3 mm ² 5-core (thru-beam type emitter: 2-core) cabtyre cable, 2 m 6.562 ft long | | | | | | | | | |
| Cable extension | | Extension up to total 100 m 328.084 ft is possible with 0.3 mm ² , or more, cable (thru-beam type: both emitter and receiver). | | | | | | | | | |
| Weight | | Emitter: 100 g approx. Receiver: 140 g approx. | | Emitter: 125 g approx. Receiver: 140 g approx. | | 140 g approx. | | | | | |
| Accessories | | Adjusting screwdriver: 1 pc. | | _____ | | RF-230 (Reflector): 1 pc. Adjusting screwdriver: 1 pc. | | RF-230 (Reflector): 1 pc. | | Adjusting screwdriver: 1 pc. | |

Notes: 1) The sensing range and the sensing object of the retroreflective type sensor is specified for the **RF-230** reflector. Further, the sensing range is the possible setting range for the reflector.
The sensor can detect an object less than 0.1 m 0.328 ft away.

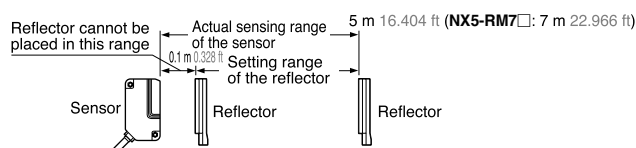


- 2) The sensing range of the diffuse reflective type sensor is specified for white non-glossy paper (200 × 200 mm 7.874 × 7.874 in) as the object.
3) If slit masks (optional) are fitted, an object as small as 3 × 6 mm 0.118 × 0.236 in can be detected.
4) In case the sensor is to be used at an ambient temperature of - 15 °C + 5 °F, or less, please contact our office.

NX5

I/O CIRCUIT DIAGRAM

I/O circuit diagram

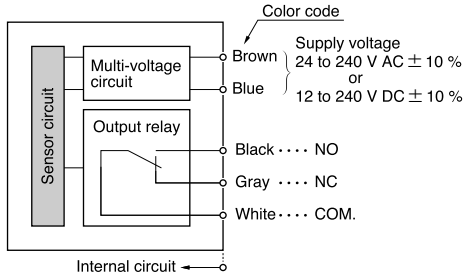

Note: The emitter of the thru-beam type sensor has two wires for power (+ V and 0 V) only.

Output operation


■: Object detected state.

| Sensing mode | Thru-beam & Retroreflective type | | | | Diffuse reflective type | | | |
|------------------|----------------------------------|--------------------|---------------------|--------------------|-------------------------|--------------------|---------------------|--------------------|
| | Light-ON (A) type | | Dark-ON (B) type | | Light-ON (A) type | | Dark-ON (B) type | |
| Output | NO (Black cable) | NC (Gray cable) | NO (Black cable) | NC (Gray cable) | NO (Black cable) | NC (Gray cable) | NO (Black cable) | NC (Gray cable) |
| Power OFF | Open | Close | Open | Close | Open | Close | Open | Close |
| Beam-received | Close | Open | Open | Close | Close | Open | Open | Close |
| Beam-interrupted | Open | Close | Close | Open | Open | Close | Close | Open |

SENSING CHARACTERISTICS (TYPICAL)

All models


Correlation between setting distance and excess gain

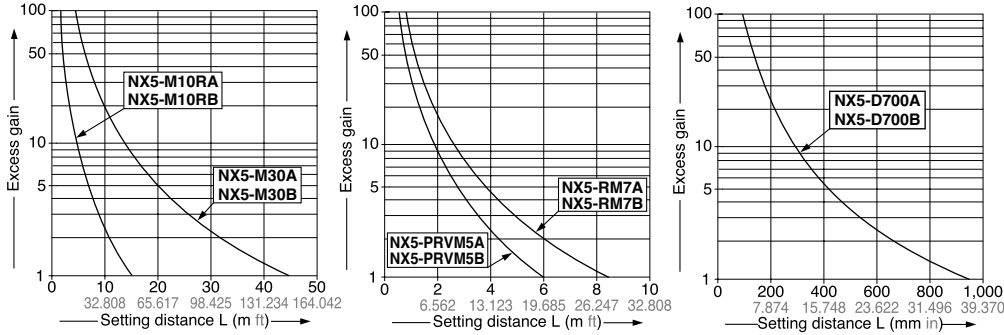


NX5-M10RA NX5-M10RB

Thru-beam type


Parallel deviation

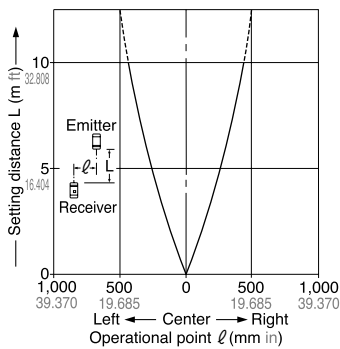

Angular deviation

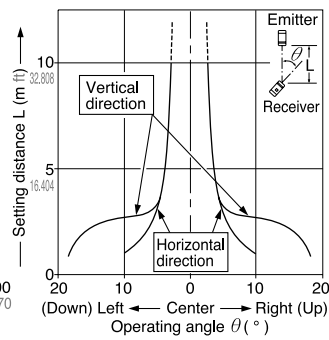


Parallel deviation with slit masks (3 × 6 mm 0.118 × 0.236 in)

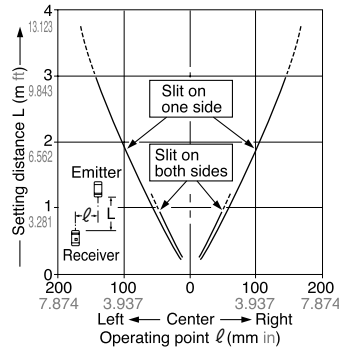


NX5-M30A NX5-M30B

Thru-beam type


Parallel deviation

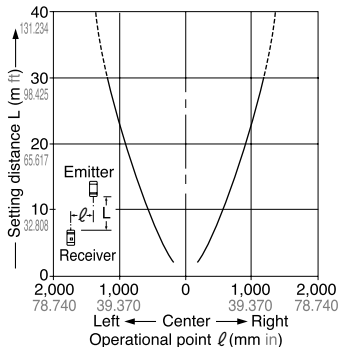

Angular deviation

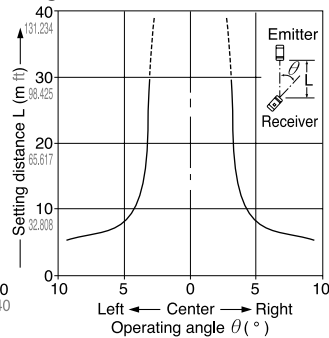

Parallel deviation with slit masks (3 × 6 mm 0.118 × 0.236 in)

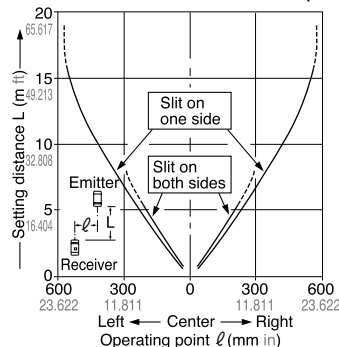


SENSING CHARACTERISTICS (TYPICAL)


NX5-PRVM5A NX5-PRVM5B

Retroreflective type

Parallel deviation

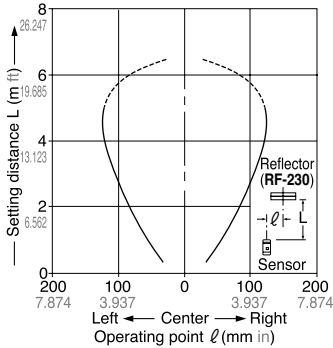


Angular deviation

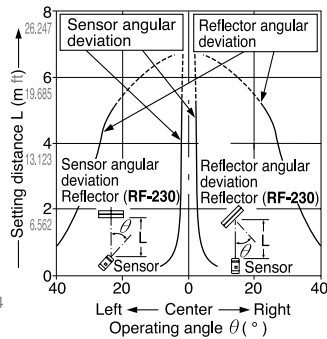


NX5-RM7A NX5-RM7B

Retroreflective type

Parallel deviation

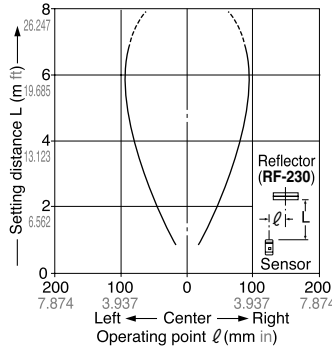


Angular deviation

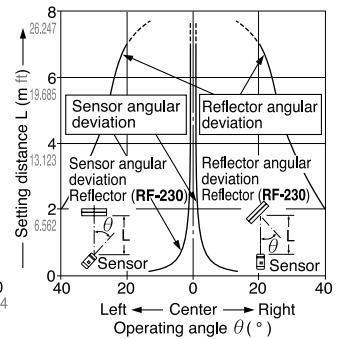


NX5-D700A NX5-D700B

Diffuse reflective type

Sensing field

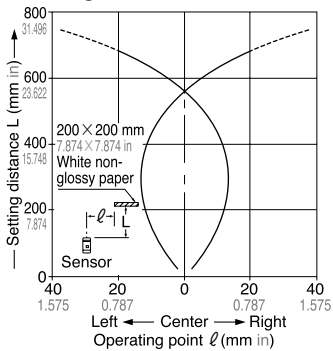

Correlation between sensing object size and sensing range

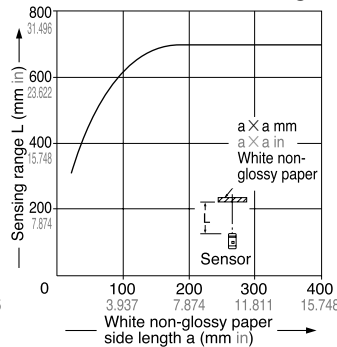

As the sensing object size becomes smaller than the standard size (white non-glossy paper 200×200 mm 7.874×7.874 in), the sensing range shortens, as shown in the left graph.


(For plotting the left graph, the sensitivity has been set such that a 200×200 mm 7.874×7.874 in white non-glossy paper is just detectable at a distance of 700 mm 27.559 in.)



This product is not a safety sensor. Its use is not intended or designed to protect life and prevent body injury or property damage from dangerous parts of machinery. It is a normal object detection sensor.


Mounting

- The tightening torque should be 0.8 N·m or less.

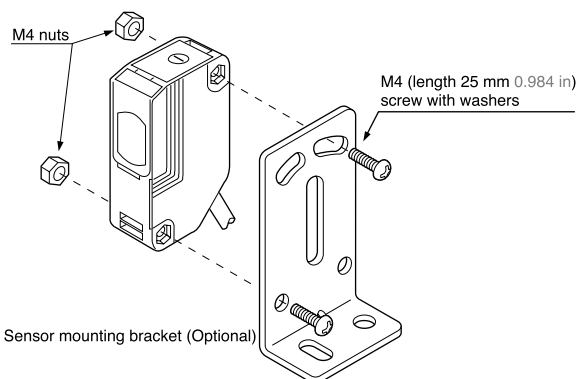

Interference prevention filter (Exclusively for NX5-M10R□)

- Use the interference prevention filters (optional) when two units of thru-beam type sensors are mounted close together.

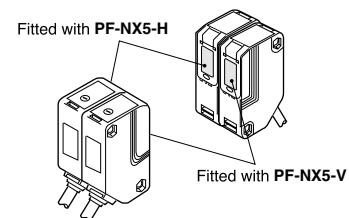

- There are two types of interference prevention filters. The two sets of thru-beam type sensors should be fitted with different types of interference prevention filters.

Note: The filters cannot be used for NX5-M30A or NX5-M30B.

Others

- Do not use during the initial transient time (50 ms) after the power supply is switched on.

NX5


PRECAUTIONS FOR PROPER USE

Retroreflective type sensor (NX5-RM7□)

- Please take care of the following points when detecting materials having a gloss.

- ① Make L, shown in the diagram, sufficiently long.
- ② Install at an angle of 10 to 30 degrees to the sensing object.

※ NX5-PRVM5□ does not need the above adjustment.

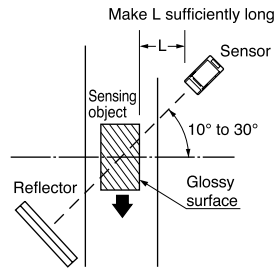

Retroreflective type sensor with polarizing filters (NX5-PRVM5□)

- If a shiny object is covered or wrapped with a transparent film, such as those described below, the retroreflective type sensor with polarizing filters may not be able to detect it.

In that case, follow the steps given below.

Example of sensing objects


- Can wrapped by clear film
- Aluminum sheet covered by plastic film
- Gold or silver color (specular) label or wrapping paper

Steps

- Tilt the sensor with respect to the sensing object while fitting.
- Reduce the sensitivity.
- Increase the distance between the sensor and the sensing object.


DIMENSIONS (Unit: mm in)

NX5-M10RA NX5-M30A NX5-M10RB NX5-M30B Sensor

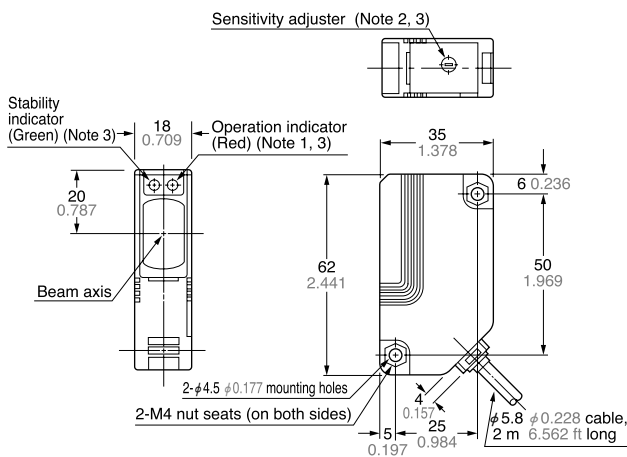


- Notes: 1) It is the power indicator (red) on the emitter of NX5-M30□.
 2) Not incorporated on NX5-M30□.
 3) Not incorporated on the emitter.

NX5-PRVM5A NX5-RM7A NX5-PRVM5B NX5-RM7B Sensor

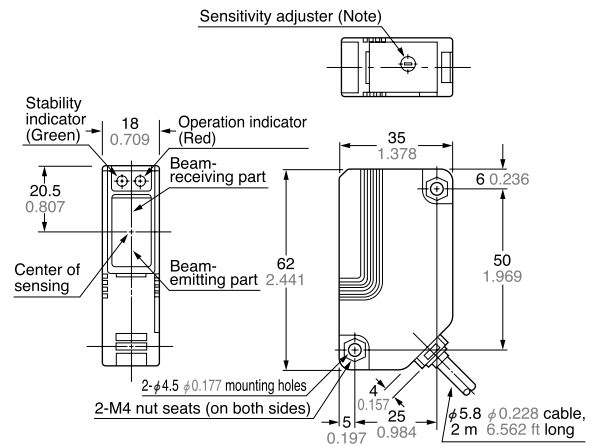

Note: Not incorporated on NX5-RM7□.


NX5-D700A NX5-D700B Sensor

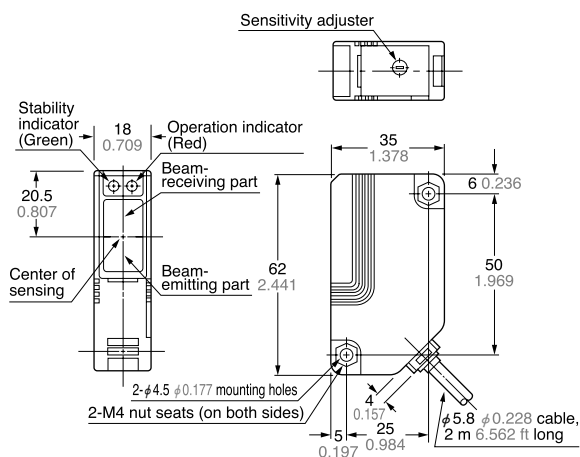

DIMENSIONS (Unit: mm in)

RF-230


Reflector (Accessory for the retroreflective type sensor)

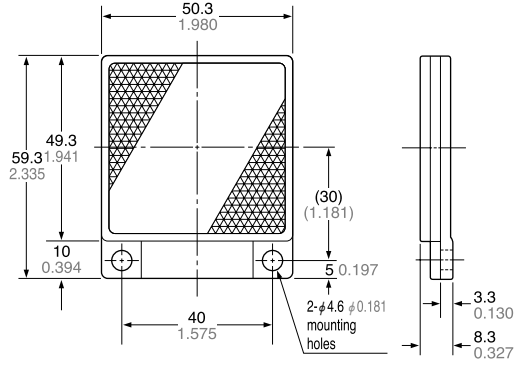

Material: Acrylic (Reflector)
ABS (Base)

RF-220


Reflector (Optional)

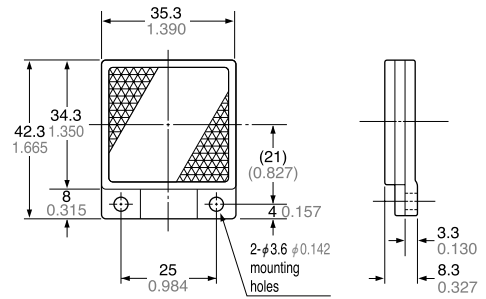

Material: Acrylic (Reflector)
ABS (Base)

RF-210


Reflector (Optional)

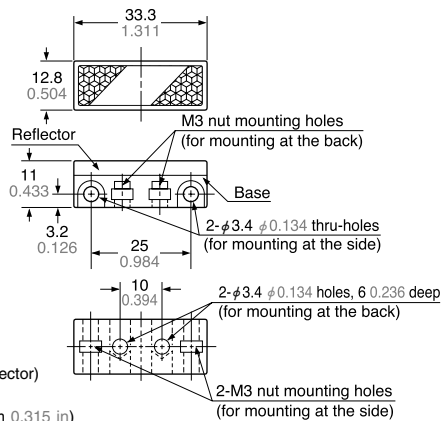

Material: Acrylic (Reflector)
ABS (Base)
Two M3 (length 8 mm 0.315 in) screws with washers and two nuts are attached.

RF-11


Reflective tape (Optional)

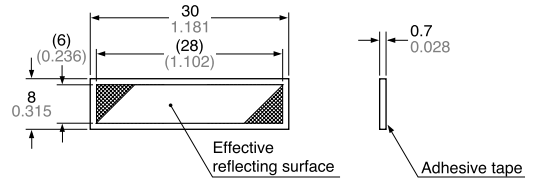

Material: Acrylic

RF-12

Reflective tape (Optional)

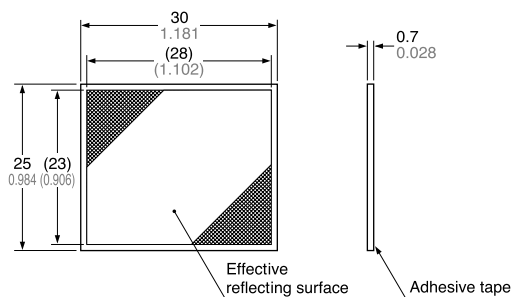


Material: Acrylic

NX5


DIMENSIONS (Unit: mm in)

MS-NX5-1 Sensor mounting bracket (Optional)

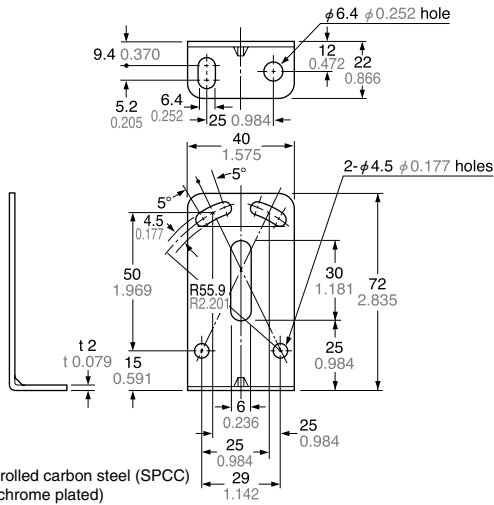


Material: Cold rolled carbon steel (SPCC)
(Uni-chrome plated)
Two M4 (length 25 mm 0.984 in) screws with washers and two M4 nuts are attached.

Assembly dimensions Mounting drawing with the receiver of NX5-M10R□

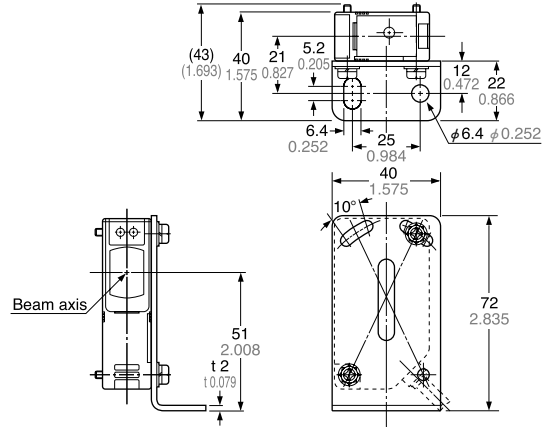


MS-NX5-2 Sensor mounting bracket (Optional)

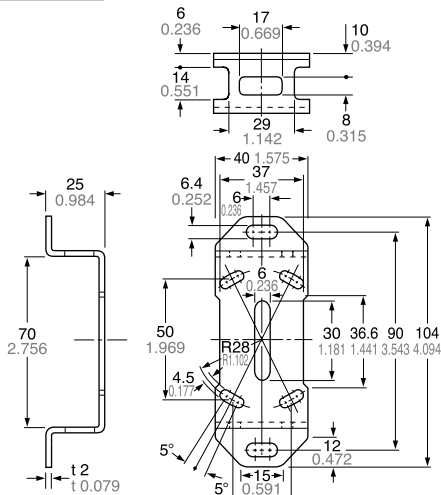


Material: Cold rolled carbon steel (SPCC)
(Uni-chrome plated)
Two M4 (length 25 mm 0.984 in) screws with washers and two M4 nuts are attached.

Assembly dimensions Mounting drawing with the receiver of NX5-M10R□

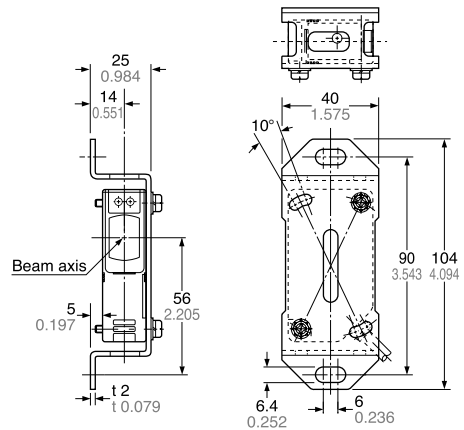


MS-NX5-3 Sensor mounting bracket (Optional)

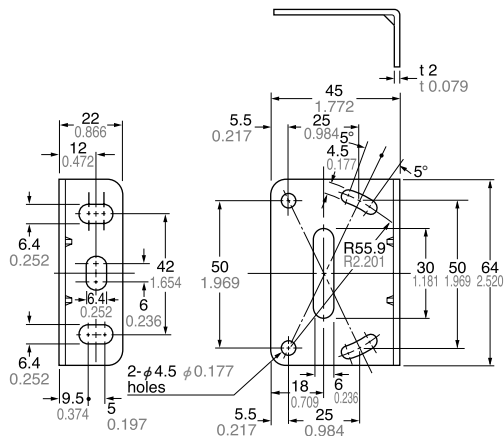


Material: Cold rolled carbon steel (SPCC)
(Uni-chrome plated)
Two M4 (length 25 mm 0.984 in) screws with washers and two M4 nuts are attached.

Assembly dimensions Mounting drawing with the receiver of NX5-M10R□

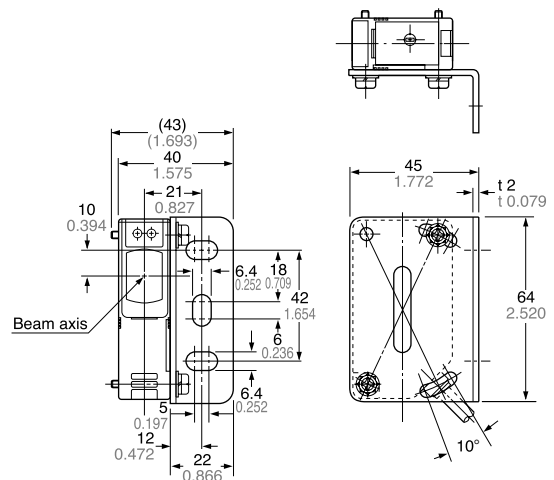


DIMENSIONS (Unit: mm in)

MS-RF21-1 Reflector mounting bracket for RF-210 (Optional)

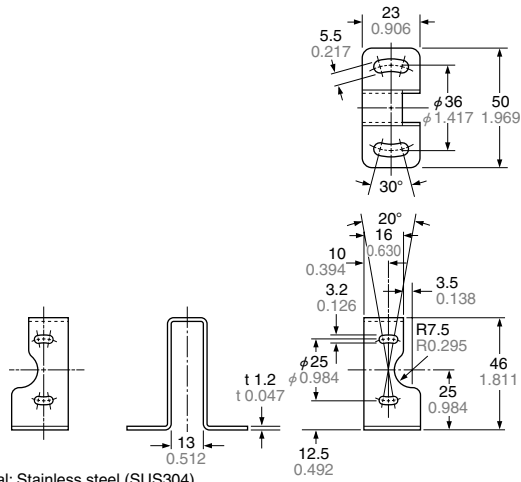


Assembly dimensions

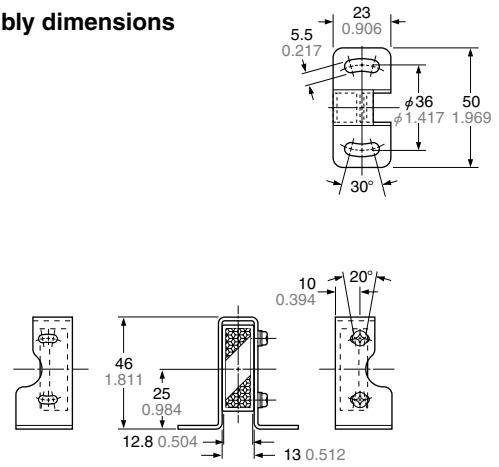


Material: Stainless steel (SUS304)

Two M3 (length 12 mm 0.472 in) screws with washers are attached.

MS-RF22 Reflector mounting bracket for RF-220 (Optional)

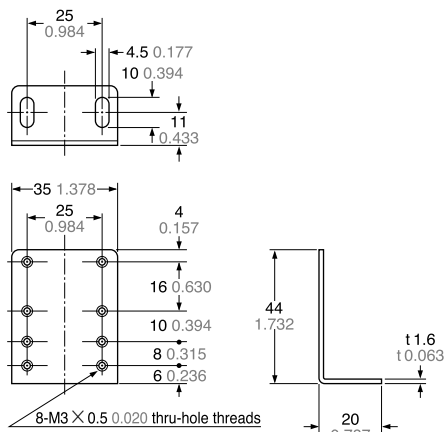


Assembly dimensions

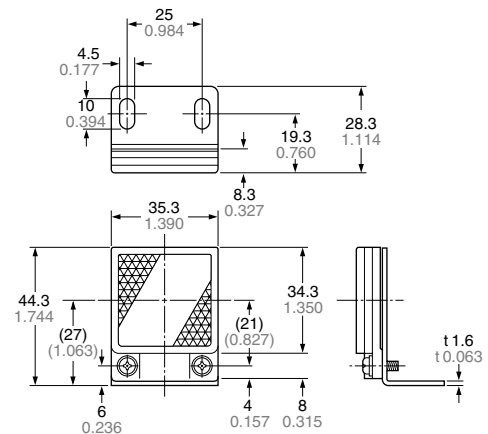


Material: Cold rolled carbon steel (SPCC)
(Uni-chrome plated)

Two M3 (length 8 mm 0.315 in) screws with washers are attached.

MS-RF23 Reflector mounting bracket for RF-230 (Optional)

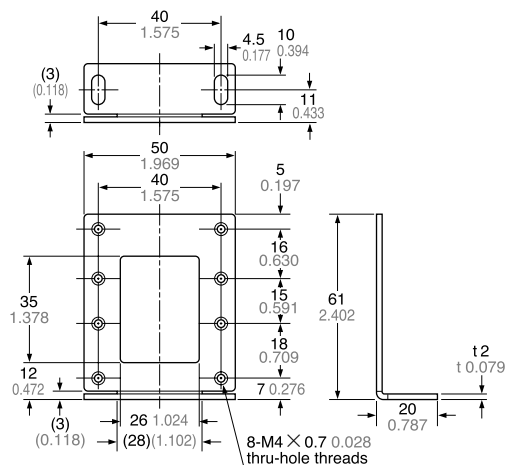

Assembly dimensions

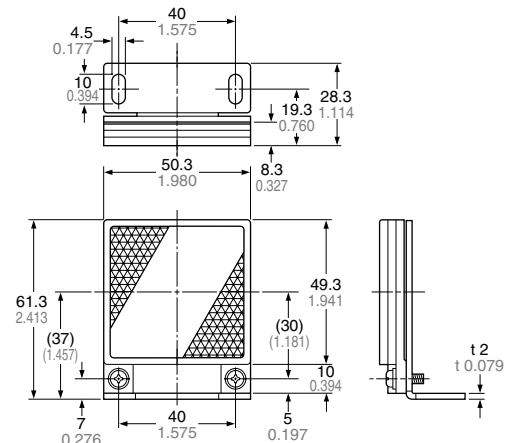

Material: Cold rolled carbon steel (SPCC)
(Uni-chrome plated)

Two M4 (length 10 mm 0.394 in) screws with washers are attached.